



HOSHIZAKI

IM-240DNE / IM-240DWNE CUBE ICE MAKER

Product Description

The IM-240D(W)NE is modular ice maker which has a production capacity of 240 kg per 24 hours. One of the key features is that it can be stacked on one or two IM-240X(W)NE's, increasing the production capacity to either 480 kg or 720 kg per 24 hours.



- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- Hoshizaki ice makers are micro computer controlled, controlling the ice making process to perform at its best under varying circumstances, without having to make physical adjustments.
- A stainless steel exterior provides a hygienic and high quality finish.
- Foam injected polyurethane for insulation (HFC free), helps preserve the quality and consistency of the ice produced, reducing the number of production cycles.
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs.

Available Models

| |
|---------------------------|
| IM-240DNE (Air Cooled) |
| IM-240DNE-23 (Air Cooled) |
| IM-240DNE-32 (Air Cooled) |
| IM-240XNE (Air Cooled) |
| IM-240XNE-23 (Air Cooled) |
| IM-240XNE-32 (Air Cooled) |
| IM-240DWNE (Water Cooled) |
| IM-240XWNE (Water Cooled) |

Ice Cubes

| Model | Size | Shape |
|------------------------|-------------------------------------|-------|
| IM240DNE/XNE/DWNE/XWNE | Large (Standard) 28 x 28 x 32 mm | |
| IM240DNE-23/XNE-23 | Medium / Large (23) 28 x 28 x 23 mm | |
| IM240DNE-32/XNE-32 | Extra large 32 x 32 x 32 mm | |

Bins

| Model | Type of Bin | Bin Capacity |
|----------------------|----------------|--------------|
| B-801SA, Top Kit IMD | Self contained | 348kg |



Production

| Model | Ice Production per 24h (Dimple Size) | Temperature | Ice Production per Cycle | Water Consumption per 24h * |
|------------|--------------------------------------|------------------|--------------------------|--|
| IM-240DNE | Approx. 240kg (15mm) / 230kg (5mm) | AT.10°C, WT.10°C | Approx. 3.2kg / 140pcs | Approx. 0,76m ³ Approx. 0,38m ³ Approx. 0,35m ³ |
| | Approx. 230kg (15mm) / 220kg (5mm) | AT.21°C, WT.15°C | | |
| | Approx. 210kg (15mm) / 200kg (5mm) | AT.32°C, WT.21°C | | |
| IM-240DWNE | Approx. 240kg (15mm) / 230kg (5mm) | AT.10°C, WT.10°C | Approx. 3.2kg / 140 pcs | Approx. 0,76m ³ Approx. 0,37m ³ Approx. 0,36m ³ |
| | Approx. 225kg (15mm) / 215kg (5mm) | AT.21°C, WT.15°C | | |
| | Approx. 215kg (15mm) / 205kg (5mm) | AT.32°C, WT.21°C | | |

*) for ice making purposes only

Two Year Warranty

For more information visit our website at www.hoshizaki-europe.com
Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.







HOSHIZAKI

IM-240DNE / IM-240DWNE CUBE ICE MAKER

IM-240DNE

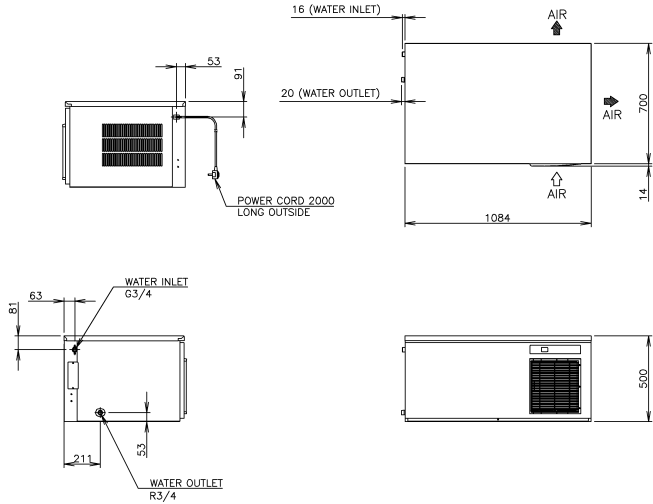

IM-240DWNE

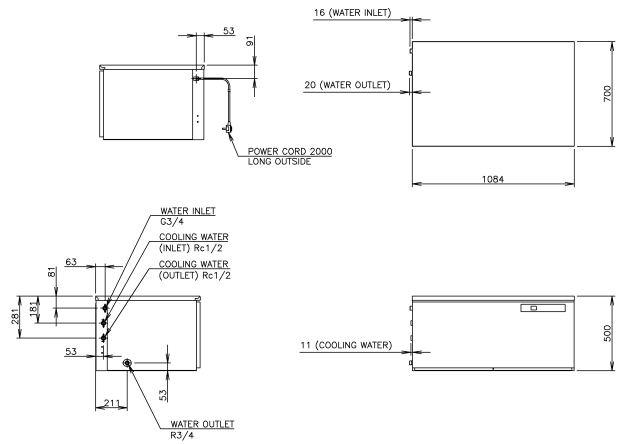

D06701 / 2010.05.10 • D06703 / 2010.05.10

| Specification | IM-240DNE (Air Cooled) | IM-240DWNE (Water Cooled) |
|--|--|--|
| AC Supply Voltage | 1 Phase 220-240V 50Hz | 1 Phase 220-240V 50Hz |
| Amperage (AT.32°C, WT.21°C) | 6,6A | 6,3A |
| Electric Consumption (AT.32°C, WT.21°C) | 1330W | 1300W |
| Exterior | Stainless Steel | Stainless Steel |
| Connections-Electric | X-Type Con. (with CONT. Plug or UK Plug) | X-Type Con. (with CONT. Plug or UK Plug) |
| Connections-Water Supply | Inlet 3/4" (connected at left side) | Inlet 3/4" (connected at left side) |
| Connections-Drain | Outlet 3/4" (connected at left side) | Outlet 3/4" (connected at left side) |
| Ice Making System | Closed Cell Type | Closed Cell Type |
| Condenser | Air-cooled, Fin and Tube type | Water-Cooled, Tube in Tube type |
| Heat Rejection (AT.32°C, WT.21°C) | 2870W | 2850W |
| Refrigerant Control | Thermostatic Expansion Valve | Thermostatic Expansion Valve |
| Refrigerant Charge | R404A | R404A |
| Ice Making Control System | Thermistor, Timer | Thermistor, Timer |
| Bin Control System | Microswitch with Time Delay Board | Microswitch with Time Delay |
| Electrical Protection | Class I Appliance, 5A Fuse | Class I Appliance, 5A Fuse |
| Compressor Protection | Auto-reset Overload Protector | Auto-reset Overload Protector |
| Ice Maker Protection | Interlock by Controller Board | Interlock by Controller Board |
| Dimensions Product excl. Packaging | 1084 x 700 x 500 (W x D x H, mm) | 1084 x 700 x 500 (W x D x H, mm) |
| Dimensions Product incl. Packaging | 1196 x 825 x 640 (W x D x H, mm) | 1196 x 825 x 640 (W x D x H, mm) |
| Weight Gross / Net | 106 kg / 88 kg | 105 kg / 87 kg |

| Operation Requirements | |
|---------------------------------|----------------------------|
| Ambient Temperature | 1 - 40°C |
| Water Supply Temperature | 5 - 35°C |
| Water Supply Pressure | 0,7-7,8 bar (0,07-0,78MPa) |
| Voltage Range | Rated Voltage ± 6% |

| Accessories |
|------------------|
| Scoop |
| Installation Kit |
| Brace |

For more information please contact your local sales office:

Hoshizaki Belgium: info@hoshizaki.be
 Hoshizaki Deutschland: info@hoshizaki.de
 Hoshizaki France: info@hoshizaki.fr
 Hoshizaki Iberia: info@hoshizaki.es
 Hoshizaki Middle East: sales@hoshizaki.ae

Hoshizaki Nederland: sales@hoshizaki.nl
 Hoshizaki United Kingdom: uksales@hoshizaki.co.uk
 Other countries: sales@hoshizaki.nl

www.hoshizaki-europe.com